
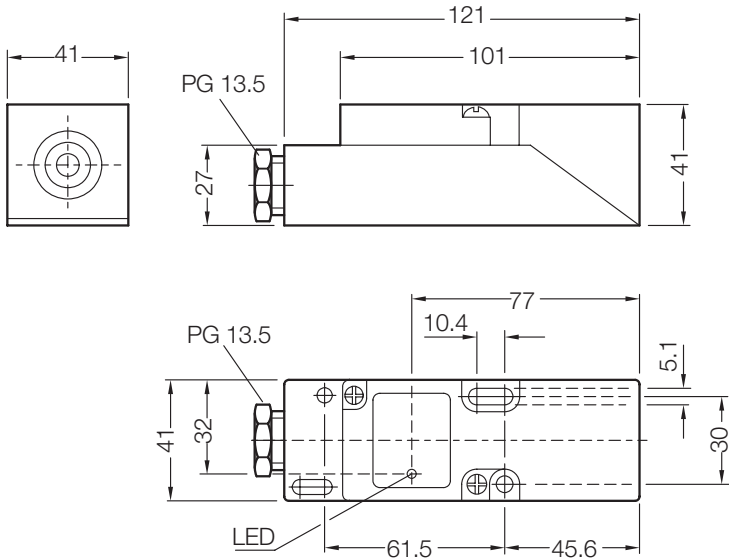


Inductive proximity sensors

IQ 40 series, sensing range 15 / 20 mm

AC / DC 2-wire, plastic housing


Dimensions in mm

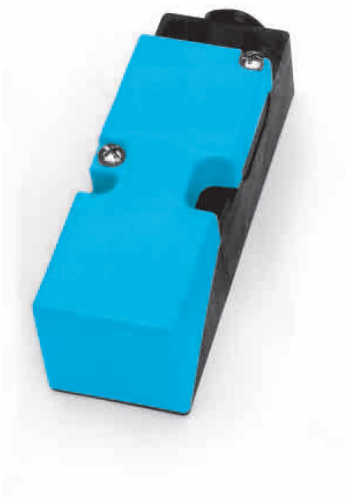

Features CE

- ▶ Can be installed flush or non-flush in metal
- ▶ Variable switching zone
- ▶ Broad operating voltage range in AC and DC
- ▶ Programmable switching output: NO or NC
- ▶ Plastic housing
- ▶ Enclosure rating IP 65
- ▶ Terminal connection
- ▶ LED status indicator
- ▶  

Connection diagram

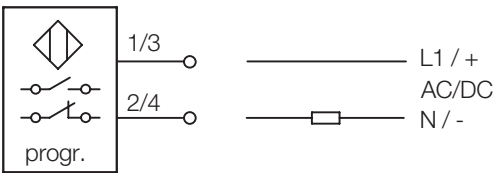



Programming with wire links
 Link closed: NO
 Link open: NC

Terminal	Assignment
1/3	L1 / +
2/4	N / -

Electrical and mechanical data

Operating voltage U_b	20 ... 250 V AC / DC	Wire-break protection	-
Voltage drop U_d (at I_a max.)	≤ 6.5 V AC / ≤ 6 V DC	Short-circuit protection (pulsed)	-
Continuous current I_a	≤ 350 mA AC (... + 50 °C) ≤ 250 mA AC (... + 80 °C) ≤ 100 mA DC	Reverse polarity protection	-
Peak current I_k	2.2 A (20 ms / 0.5 Hz)	Power-up pulse suppression	yes
Min. load current	5 mA	Enclosure rating to EN 60529	IP 65
Residual current	≤ 2.5 mA (250 V AC) ≤ 1.3 mA (110 V AC) ≤ 0.8 mA (24 V DC)	Protection class	
Time delay before availability t_v	approx. 8 ms	Shock and vibration stress	30 g, 11 ms 10 to 55 Hz, 1 mm
Hysteresis H	1% - 15% of s_r	Ambient temperature T_a	- 25 ... + 80 °C
Repeatability R (U_b and T_a constant)	$\leq 10\%$ of s_r	Housing material	Plastic
Temperature drift	$\pm 10\%$ of s_r		
EMC	to EN 60 947-5-2		

Selection table

Sensing range s_n mm	Installation in metal	Output function	Switching frequency f in Hz	Connection	Type	Order number
15		 progr.	20 (AC) / 55 (DC)	Terminal up to 2.5 mm ²	IQ40-15BUP-KK0	7902136
20		 progr.	20 (AC) / 55 (DC)	Terminal up to 2.5 mm ²	IQ40-20NUP-KK0	7902137